


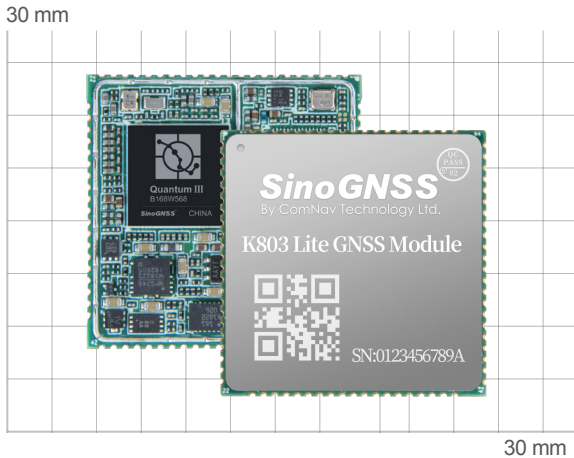

Size(L × W × H): 30 mm × 30 mm × 3.2 mm

Weight: 8g

Features

GPS, BeiDou, GLONASS Galileo, QZSS, IRNSS, SBAS

BeiDou Global Signal B1C, B2a, B2b¹

Support L-Band and PPP⁴

Surface-mounted design and small size to integrate

High-performance floating-point arithmetic

Industry-leading low power consumption

Internal adaptive anti-interference algorithm

K803Lite GNSS Module

Easy Integration

30mm×30mm×3.2mm size module with surface-mounted design makes K803Lite modules ideal for users to integrate. The power consumption is lower to 0.65W.

In built newly Quantum III SoC chip

The K803Lite incorporates ComNav's new generation high-accuracy Quantum III SoC chip with the capability of tracking all the GNSS constellations and signals. It can provide users with highly reliable positioning information with support of high-performance floating point arithmetic.

Adaptive Anti-interference Technology

The K803Lite has internal adaptive anti-interference algorithm which enables the module effectively suppress wideband, narrowband and continuous-wave interference. It can provide users with high-quality observing data even in the complex electromagnetic environment.

K803Lite GNSS Module

K Series GNSS Module

Ver.2020.10.26

Signal Tracking

Channels	965
GPS	L1 C/A, L2C, L2P
BeiDou	B1, B2
BeiDou Global Signal	B1C, B2a, B2b ¹
GLONASS	L1 C/A, L1P, L2C/A, L2P
GALILEO	E1
QZSS	L1, L2C
SBAS	WAAS, EGNOS, MSAS, GAGAN,SDCM
L-Band ⁴	

Performance Specifications

Cold start	<60 s ⁵
Hot start	<15 s
RTK Initialization time	<10 s
Signal reacquisition	<1 s
Initialization reliability	>99.9%
Velocity accuracy	≤ 0.02 m/s
Overload	15 g
Time accuracy	20 ns

Positioning Specifications

Post Processing	2.5 mm + 1 ppm Horizontal 5 mm + 1 ppm Vertical
Single Baseline RTK	8 mm + 1 ppm Horizontal 15 mm + 1 ppm Vertical
DGPS	<0.4 m RMS
SBAS	1 m 3D RMS
Standalone	1.5m 3D RMS

Communications

4 LVTTTL ports
1 SPI ⁶
2 Event Marker input
1 Pulse Per Second (PPS) output
3 indicator pins show the working status

1. B2b is reserved for future upgrade.
2. Cold start < 40s with the signal acquisition acceleration module.
3. IRNSS is reserved for future upgrade.
4. L-Band is optional.
5. Cold start < 40s with the signal acquisition acceleration module.
6. SPI is reserved, support customization.

Data Format

Correction data I/O	RTCM2X,3X,CMR(GPSonly),CMR+(GPSonly)
Position data output	-ASCII: NMEA-0183 GGA, GSA, GSV, RMC, HDT, VHD, ZDA, VTG, GST, GLL; PTNL, PJK; PTNL, AVR; PTNL, GGK -ComNav Binary -BINEX Data: 0x00, 0x01-01, 0x01-02, 0x01-05, 0x7d-00, 0x7e-00, 0x7f-05 -Position data output rate: 1 Hz, 2 Hz, 5 Hz, 10 Hz,20Hz

Antenna Interface

Impedance Match	Wiring 50 Ω impedance matching
LNA Power: External	+3.3V ~ +5V ± 5%VDC @ 0-100mA
LNA Gain	20 ~ 40dB (suggested)

Physical

Size (L × W × H)	30 mm × 30 mm × 3.2 mm
Hardware interface	LGA 82 pin
Weight	8 g

Environmental

Working temperature	-40 °C to + 85 °C
Storage temperature	-55 °C to + 95 °C

Electrical

Input voltage	+3.3 V ± 5% DC
Power consumption	0.65 W (Anti-interference off)

Software

ComNav Compass Receiver Utility software
Compass Solution software

Optional Accessories

AT-series GNSS antenna
5m/10m RF Cables