

Technical Specifications

GNSS Autosteer System

Ver.2026.03.31

Positioning Accuracy

Real time kinematics (RTK)	8mm+1ppm(Horizontal) 15mm+1ppm(Vertical)
Velocity accuracy	<0.02 m/s
Initialization Time	<10 s
Initialization reliability	99.9%

Performance

Pass to pass accuracy	±2.5cm
Work speed	0.1~27km/h
Work scene	Low / High speed, Straight / Curve Automatic U-turn

Physical

Operating Temperature	-30°C~+70°C
Storage Temperature	-40°C~+85°C

Electric Steering Wheel

Power input	12V~24V
Torque	6.2 N·m
Motor height	94.3 mm
Motor diameter	171 mm
Wheel diameter	380mm

GNSS Tablet

Size	10.1"
Resolution Rate	1280*800
Memory	4GB RAM 64GB ROM
Operating System	Android 9
Waterproof and dustproof	IP66


Signal Tracking

GPS	L1, L2, L5
BDS	B1I, B2I, B3I, B1C, B2a, B2b
GLONASS	L1, L2, L3
Galileo	E1, E5b, E5a, E6, E5 AltBOC
QZSS	L1, L2, L5
NAVIC	L5


Communication and Data

Wifi/Bluetooth	Yes
Type C port	1
USB port	3
TF card slot	1
CAN port	1
Sensor Port	1
4G antenna port	1
7-pin Lemo port	1
UHF antenna port	1

All Farming Procedures



Ridging



Seeding



Spraying



Harvesting

ComNavTech



AG501 Pro

GNSS Autosteer System




ComNav Technology Ltd.

Building 2, No. 618 Chengliu Middle Road,
201801 Shanghai, China
Web: www.comnavtech.com
Email: sales@comnavtech.com
Tel : +86 21 64056796
Fax: +86 21 54309582



Automatic U-Turn



A Plus Heading



Rapid Installation in 30 min



Pass-to-Pass Accuracy ±2.5cm



More Stable & Reliable Signal

AG501 Pro GNSS Automated System

The AG501 Pro is an automated steering system that uses a smart antenna. The system combines the advantages of convenient installation, high torque, high precision, low noise, and quick troubleshooting in a single package. GNSS+INS terrain compensation technology ensures 2.5 cm pass-to-pass accuracy on any terrain and provides superior performance for sowing, cultivating, trenching, ridging, spraying, transplanting, land consolidation, and harvesting. This system accommodates an extensive range of agricultural machinery, such as seeder, rice transplanters, sprayers, and harvesters.



A100 Pro Smart Antenna

- Full-constellation and multi-frequency tracking capability
- Compact size, Easy for installation
- IP67 waterproof and dustproof



Electric Steering Wheel

- High-torque motor with nimble reaction and high stability
- Compatible to most tractor types



P300 Plus Tablet

- 10.1" inch screen
- High resolution, sunlight readable, Android Operating System
- Rugged design with dust- and waterproofness, shock-resistance
- Integrated design, low latency

Convenient Installation




Convenient Installation

With the integration of the smart antenna, AG501 Pro's installation becomes a simple process, minimizing operational downtime in the field. Its user-friendly design allows for swift transferability between different tractors, showcasing unparalleled levels of versatility and adaptability.

High Accuracy

AG501 Pro supports full-constellations tracking, including GPS, BDS, GLONASS, Galileo, QZSS. Enhanced by satellite-based differential services such as PPP B2b and HAS, as well as ground-based differential services like local CORS, it can achieve centimeter-level accuracy, reduce skips and overlaps.

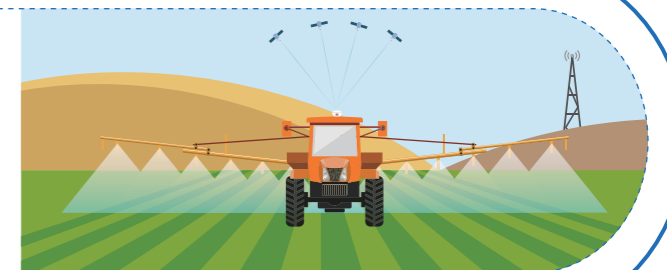

Multiple Functions

Multiple guidelines are available in AG501Pro system, including Parallel straight lines, curves, A+Heading, and automatic u-turns, catering to different farming procedures. The utilization of combined GNSS+INS terrain compensation technology significantly enhances reliability. AG501 Pro accommodates speeds ranging from 0.1 to 27 km/h.

User-Friendly Interface

The user-friendly interface simplifies configuration processes, enables swift task creation and activation of guidance lines, hence facilitating rapid, precise access to desired functions and uplift the using experience.



Benefit

